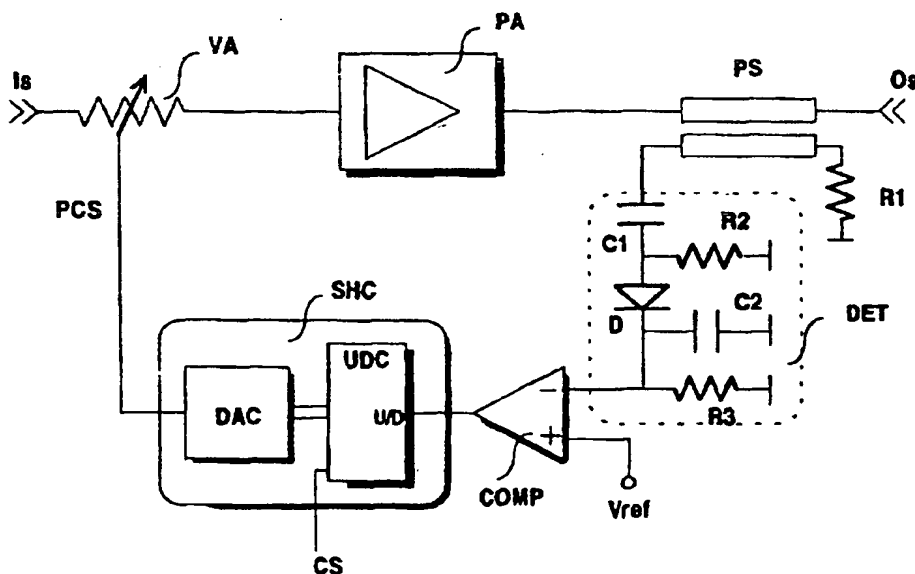




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H03G 3/30	A1	(11) International Publication Number: WO 97/05697 (43) International Publication Date: 13 February 1997 (13.02.97)
<p>(21) International Application Number: PCT/EP96/03313</p> <p>(22) International Filing Date: 26 July 1996 (26.07.96)</p> <p>(30) Priority Data: P 9501548 31 July 1995 (31.07.95) ES</p> <p>(71) Applicant (for all designated States except AU CA JP US): AL- CATEL STANDARD ELECTRICA S.A. [ES/ES]; Ramirez de Prado, 5/6, E-28045 Madrid (ES).</p> <p>(71) Applicant (for AU CA JP only): ALCATEL N.V. [NL/NL]; Burgemeester Elsenlaan 170, NL-2288 BH Rijswijk (NL).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): BONILLA MENEN- DEZ, Eduardo [ES/ES]; Capitán Blanco Argibay, 51, E- 28029 Madrid (ES). YUSTE HERNANDEZ, Juan Antonio [ES/ES]; Goya 5, 4. F, E-28807 Alcala de Henares (ES). DEL PINO JUAREZ, Antonio [ES/ES]; José del Rio 26, 2. D, E-28019 Madrid (ES).</p> <p>(74) Agents: POHL, Herbert et al.; Alcatel Alsthom, Intellectual Property Dept., Postfach 300 929, D-70449 Stuttgart (DE).</p>		<p>(81) Designated States: AU, BR, CA, CN, HU, JP, PL, RU, UA, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: OUTPUT POWER CONTROL IN BURST TRANSMITTERS



(57) Abstract

Output power control in burst transmitters that comprise a power amplifier stage the gain of which varies according to a power control signal (PCS), an output signal sensing circuit (PS), a detector (DET) that generates a DC voltage signal proportional to the level of the sensed signal and a comparator (COMP) to generate the power control signal (PCS) in proportion to the difference between the DC voltage coming from the detector (DET) and a reference voltage (Vref). The power control signal (PCS) is sampled in a sample-and-hold circuit (SHC) using the active edges of a clock signal (CS), these occurring only at the moments when there are signal bursts to be transmitted and at a time subsequent to the start of each burst greater than the duration of the transient of the DC analogue voltage signal at the output of the detector.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

OUTPUT POWER CONTROL IN BURST TRANSMITTERS

OBJECT OF THE INVENTION

This invention concerns power transmitters for radiofrequency signals in which the signal to be transmitted consists of bursts, consequently there are many periods when this signal is zero.

The power control presented here permits the mean power of the output signal to be kept constant and controlled during the bursts, irrespective of the relationship between the periods of burst transmission and the periods between bursts when the signal is zero.

BACKGROUND OF THE INVENTION

The need to maintain the output signal power steady from power amplifiers in radiofrequency transmitters, means these transmitters must incorporate some control mechanism which ensures this requirement irrespective of such major factors such as input signal power, power amplifiers gain, variations in this gain with temperature, ageing, etc.

This control is normally achieved by means of a power feedback loop. This loop is based on detecting the output power of the final power amplifier, obtaining a signal proportional to this output power for comparison with a stable reference in a differential amplifier, the output of which generates a power control signal which is used to modify the gain in one of the amplifier stages.

In this way a potential increase in output power is converted into a decrease in the amplifier gain, offsetting the increase mentioned and thereby maintaining the output power constant.

An example of the foregoing can be seen in the European patent application EP 0462773.

The output power detector is usually a directional coupler with a load resistor and a rectifier. Afterwards there is a lowpass filter with a fairly narrow bandwidth such that the value obtained at its output does not fluctuate and therefore does not introduce amplitude modulation in the output signal.

Moreover, in burst transmitters, the preceding principle is not applicable as such because the reading would be in error through calculating the mean value of output power taking into consideration the zero signal periods and would be further impaired when the system permits,

- 2 -

according to the level of occupancy of the channels, the omission of bursts in the frame formed by the burst assembly.

The patent application mentioned above proposes a solution to this problem by applying to one of the differential amplifier inputs, instead of a
5 fixed reference voltage, a pulse signal which takes a determined steady value during the periods of transmission of each burst and a zero or very low value for the rest.

Nevertheless this alternative does not overcome the problem arising particularly when the gain of the differential amplifier is very large, since any
10 voltage offset in the amplifier or detector, no matter how small, would saturate the differential amplifier, causing the power amplifier to adopt one of its extreme positions (maximum gain or minimum gain) in the absence of an input signal. This would result in a transient in the output signal power at the start of each burst until the loop could force the power amplifier to its
15 equilibrium working point. How long this transient is, would depend on the bandwidth of the lowpass filter of the output power detector, among other things.

During this transient period, the output signal would therefore suffer amplitude modulation, which has a very harmful effect on the
20 communications established.

CHARACTERISATION OF THE INVENTION

This invention is intended for overcoming the drawbacks mentioned above in burst transmitters, the latter comprising a power amplifier stage whose gain is varied in accordance with a power control signal, means for
25 sensing the output signal, a detector that produces a DC voltage signal proportional to the level of the sensed signal and a differential amplifier to generate the power control signal in proportion to the difference between the DC voltage from the detector and a reference voltage.

The power control signal mentioned is sampled in a sample-and-hold
30 circuit using the active edges of a clock signal, these occurring only at the instants when there are burst signals to be transmitted and at a time subsequent to the start of each burst greater than the duration of the transient of the DC analogue voltage signal at the output of the detector.

BRIEF FOOTNOTES TO THE FIGURES

35 A fuller explanation of the invention can be found in the following

- 3 -

description of a preferred implementation based on the figures attached, in which:

- figure 1 shows a block diagram of an output power control circuit in accordance with the state of the art,

5 - figure 2 is the output power control circuit according to the invention,

- figure 3 shows a circuit like the previous one but in which the attenuator employed is of the digital type, and

10 - figure 4 shows time domain diagrams of various signals at points in the power control feedback loop.

DESCRIPTION OF ONE WAY OF IMPLEMENTING THE INVENTION

Below is given a description of an implementation of the power control circuit that makes use of the principle according to the invention object of this patent.

15 The output power control is based on a known technique that is represented by the block diagram as shown in figure 1.

Thus, there is a power amplification stage PAS, of variable gain, which receives an input signal I_s and which boosts the power of the output signal O_s by a determined factor termed the power gain.

20 A small sample of this output signal O_s is taken by means of an output signal sensing circuit PS, which is applied to a power detector DET which, in turn, produces a baseband signal proportional to the mean power of the output signal O_s , whereby this baseband signal can be subsequently used to perform control of the power in the output signal O_s by means of a
25 feedback process.

The output signal from the detector DET is applied to one of the inputs of a comparator COMP which receives, through its other input, a reference voltage V_{ref} , the output signal from this comparator COMP being proportional to the difference between the two input signals, that coming
30 from the detector DET and the reference voltage V_{ref} .

This output signal from the comparator COMP is a power control signal PCS that is applied to the power amplifier stage PAS to vary its gain such that, by means of the feedback loop so formed, an increase in the mean power of the output signal O_s results in a decrease in the gain of the
35 preceding power amplifier stage PAS and, through this, a decrease in the

power of the output signal that offsets the initial increment.

As a consequence of this, a balanced control of the output signal O_s of the power amplifier is achieved against possible variations in or tolerances of the components and signals existing in the assembly.

5 When the signal that is applied to the power amplifier stage PAS is not steady but, as is shown in figure 4.a, formed by bursts, its mean power has to be calculated by means of lowpass filtering with a very narrow bandwidth and a very large time constant since, otherwise, amplitude modulation would be introduced in the output signal, which is extremely
10 harmful. Figure 4.b shows the waveform of the power signal detected in a situation where the time constant of the lowpass filter of the detector is not very large.

 When the lowpass filtering is done with a very large time constant, the output signal from the detector is practically a continuous signal, thereby
15 avoiding the amplitude modulation of the output signal from the amplifier; nevertheless, this mean value of the detected output power is not correct since it does not depend only on the mean power of the bursts, but also on the actual presence of these bursts. Thus, the output of each burst is not constant but depends on the occupancy level, or number of bursts present,
20 in the transmitted frames.

 Figure 2 shows the solution proposed by this invention in order to make the power control independent of the level of occupancy of the frames. In this power control, the power amplifier stage is formed by a non-linear power amplifier PA of fixed gain, preceded by a variable attenuator
25 VA such that the overall gain of the assembly is also variable.

 The variable attenuator VA offers an attenuation that depends on the value of the power control signal PCS, it being approximately proportional to this value. This attenuator consists of a PIN type diode connected between the signal line and ground, such that it presents a resistance to ground that
30 depends on its bias voltage. The greater the forward bias voltage, the less the resistance presented to ground is and, consequently, the greater the attenuation presented to the signal being transmitted along the line is.

 The power sensing circuit PS is formed by a two-line microstrip directional coupler. The coupling loss of this device is, for the present case,
35 30 dB and it is loaded with a resistance R1 of 50 Ω .

- 5 -

To the other extremity is connected the detector DET; at its input this has a highpass filter C1, R2 with a cutoff frequency below the working frequency of the amplifier. Afterwards there is a detecting diode D and a lowpass filter C2, R3, the time constant of which is about ten times less than the duration of the bursts.

The output signal from this detector DET is applied to the inverting input of the comparator COMP, the non-inverting input being connected to the reference voltage Vref. The output signal from this comparator COMP takes a value of 5 V, or logical 1, when the output signal of the detector is less than the reference voltage, it being 0 V, or logical 0, otherwise.

The output signal of the aforementioned comparator COMP is applied to a sample-and-hold circuit SHC which, in this case, is formed by a digital up/down counter UDC and a digital-to-analogue converter DAC.

The digital up/down counter UDC receives, as a clock signal, a control signal CS consisting of pulses, the presence of which corresponds to the appearance of transmitted bursts and the width of which is equal to one half of burst duration. Thus, the falling edge of these pulses which is considered to be the clock active edge, coincides with the centre of each burst.

This digital up/down counter UDC also receives the output signal from the comparator COMP at its up/down count input. In this way the count value stored in it is increased by one unit when an active clock pulse edge appears, that is, in the centre of each burst, and, in addition, the output voltage of the detector DET is greater than the reference voltage Vref; otherwise there is a decrease.

The outputs of this up/down counter UDC are applied to the digital-to-analogue converter DAC where an output voltage is produced that is proportional to the value stored in the up/down counter UDC mentioned and which is termed the power control signal PCS, as already stated.

This power control signal PCS is applied to the control input of the variable attenuator VA, which offers an attenuation in the incoming signal path which becomes greater as the power control signal increases.

When use is made of a digitally controlled variable attenuator, then there is no need for a digital-to-analogue converter, as is shown in figure 3, and the digital output of the up/down counter UDC is applied directly to the

- 6 -

attenuator VA mentioned.

In this way, the power control loop permits true control of the mean transmitted power calculated in each burst, irrespective of the appearance or not of a given burst without this affecting the mean value mentioned. This
5 also permits the filter employed for calculating the mean value of the transmitted power to have a much faster response, as can be seen in figure 4.c, and the control to be active for a very short time.

When the loop is balanced, the output of the comparator COMP takes the values of logical 1 and 0 alternatively, which makes the power
10 control signal PCS oscillate between two values, as can be seen from figure 4.d, the proximity of these two values becoming greater as the number of bits employed by the digital up/down counter UDC and by the digital-to-analogue converter DAC becomes greater.

This last situation can be avoided by making the digital-to-analogue
15 converter DAC not use the two bits of least weight from the counter.

A very large number of bits in the digital-to-analogue converter DAC permits the power of the output signal to be kept within a very narrow range, though it implies that the initial system response is very slow; this can be improved if the initial value of the counter is pre-established in accordance
20 with calculations made which depend on the rest of the parameters of the loop.

CLAIMS

1.- **OUTPUT POWER CONTROL CIRCUIT FOR BURST TRANSMITTERS** that comprise a power amplifier stage (PAS) the gain of which varies according to a power control signal (PCS), an output signal
5 sensing circuit (PS), a detector (DET) that generates a DC voltage signal proportional to the level of the sensed signal and a comparator (COMP) to generate the power control signal (PCS) in proportion to the difference between the DC voltage coming from the detector (DET) and a reference voltage (Vref) **characterised** in that it also comprises a sample-and-hold
10 circuit (SHC) which receives a clock signal (CS) and which samples the power control signal (PCS) only at the moments when there are signal bursts to be transmitted.

2.- **OUTPUT POWER CONTROL CIRCUIT** according to claim 1, **characterised** in that the sampling of the power control signal is realized at
15 a time subsequent to the start of each burst greater than the duration of the transient of the DC analogue voltage signal at the output of the detector (DET).

3.- **OUTPUT POWER CONTROL CIRCUIT** according to claim 1, **characterised** in that the sample-and-hold circuit (SHC) comprises:

- 20 - a digital up/down counter (UDC) which receives the clock signal (CS) and to which is applied as the up/down count control signal (U/D) the output signal from the comparator (COMP), and
- a digital-to-analogue converter (DAC) which receives the output of the digital counter (UDC) and whose analogue output signal is applied to
25 the variable power amplifier stage as the power control signal (PCS).

4.- **OUTPUT POWER CONTROL CIRCUIT** according to claim 3 **characterised** in that the power amplifier stage (PAS) comprises a power amplifier (PA) preceded by a variable attenuator (VA), the attenuation of which varies in accordance with the power control signal (PCS).

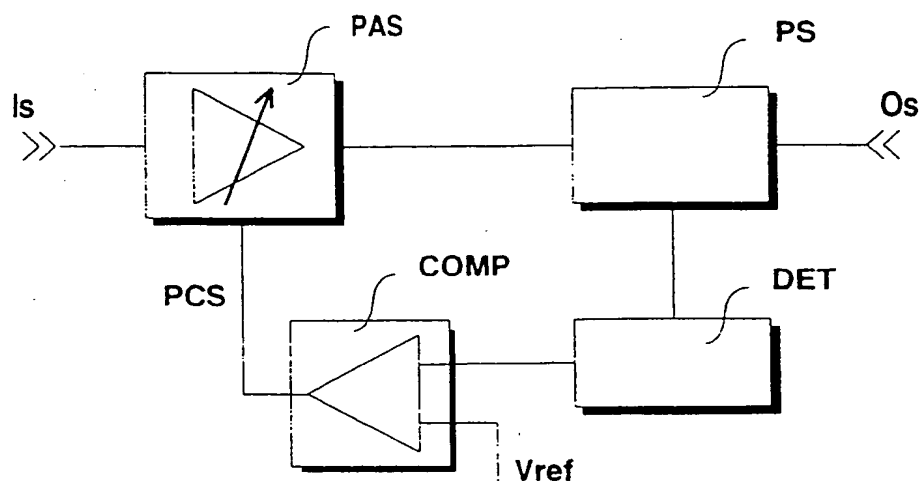
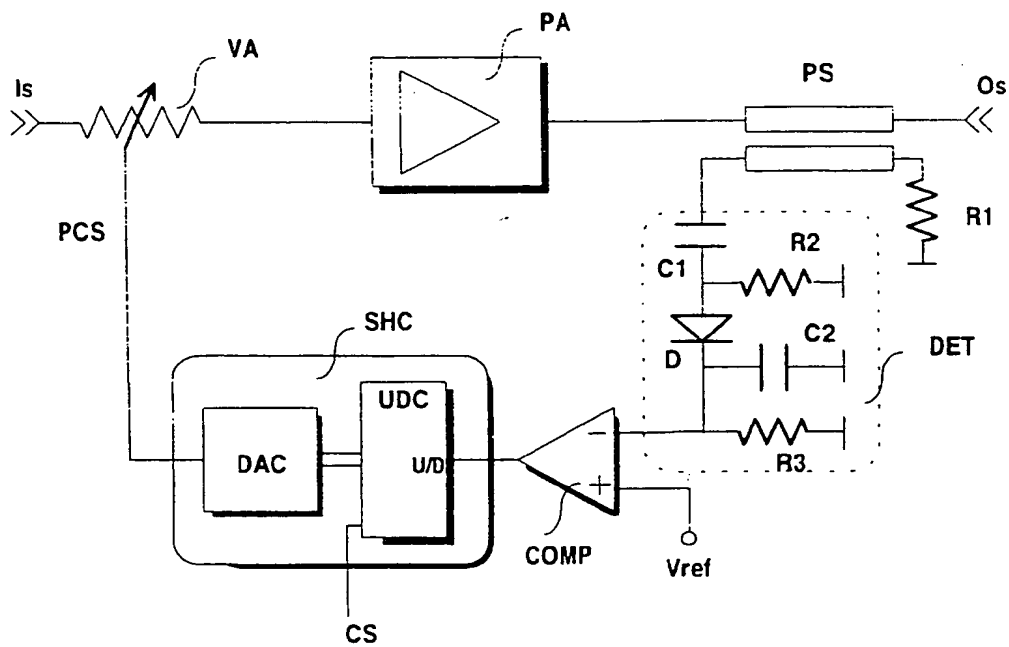
30 5.- **OUTPUT POWER CONTROL CIRCUIT** according to claim 4 **characterised** in that the variable attenuator (VA) is digitally controlled and directly receives the output signal from the digital up/down counter (UDC), there being no need to use a digital-to-analogue converter.

6.- **OUTPUT POWER CONTROL METHOD FOR BURST TRANSMITTERS** **characterised** in that it comprises the stages of:
35

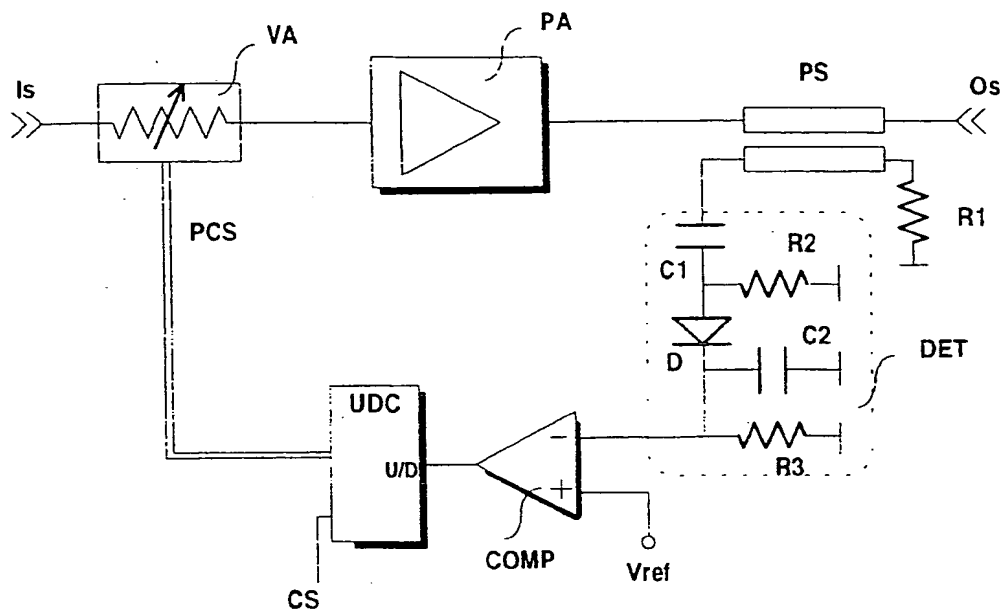
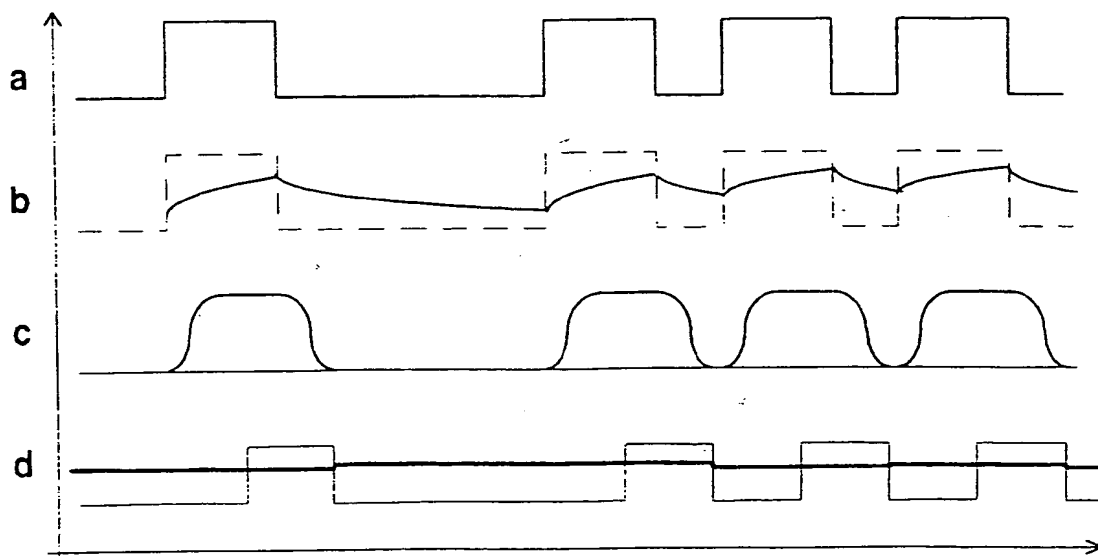
- 8 -

- extraction of a small part of the transmitter output signal,
 - detection of the mean power of this extracted signal,
 - comparison of the detected mean power with a reference signal,
 - sampling and holding, with a clock signal, of the value of the
- 5 comparison previously performed, and
- variation in the gain of the amplifier stage of the main signal in accordance with the value of the signal coming from the preceding sample-and-hold process.

1/2

**Fig. 1****Fig. 2**

2/2

**Fig. 3****Fig. 4**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 96/03313

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H03G3/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 010, no. 384 (E-466), 23 December 1986 & JP 61 173507 A (NEC CORP), 5 August 1986, see abstract	1-4,6
P,X	EP 0 688 108 A (MITSUBISHI ELECTRIC CORP) 20 December 1995 see abstract	1-4,6
X	EP 0 535 669 A (MATSUSHITA ELECTRIC IND CO LTD) 7 April 1993 see abstract	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

19 November 1996

Date of mailing of the international search report

- 4. 12. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Blaas, D-L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 96/03313

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 009, no. 240 (E-345), 26 September 1985 & JP 60 090408 A (TOSHIBA KK), 21 May 1985, see abstract	1,5
A	--- US 3 969 683 A (FABRICIUS WAYNE NIXON) 13 July 1976 see abstract; figures 1,1A	5
A	--- EP 0 632 585 A (ALCATEL TELSPACE) 4 January 1995	1-6
A	--- EP 0 509 733 A (MITSUBISHI ELECTRIC CORP) 21 October 1992 -----	1-6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 96/03313

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0688108	20-12-95	JP-A- 8008768 US-A- 5566363	12-01-96 15-10-96
EP-A-0535669	07-04-93	JP-A- 5095295 DE-D- 69209206 DE-T- 69209206 US-A- 5369789	16-04-93 25-04-96 02-10-96 29-11-94
US-A-3969683	13-07-76	CA-A- 1080815 DE-A- 2617114 DE-C- 2660662 FR-A- 2308972 GB-A- 1530183 JP-A- 51128248	01-07-80 11-11-76 23-09-82 19-11-76 25-10-78 09-11-76
EP-A-0632585	04-01-95	FR-A- 2708399 CA-A- 2126919 JP-A- 7079125 US-A- 5430410	03-02-95 31-12-94 20-03-95 04-07-95
EP-A-0509733	21-10-92	JP-A- 4316205 US-A- 5208550	06-11-92 04-05-93

THIS PAGE BLANK (USPTO)